

DOOR ENTRY SOLUTIONS



MODULAR ANALOGUE DOOR PHONE

Telstrom provide a range of cost effective Door Phone systems, incorporating Italian styling, video and secure access for single entranceways, businesses and multi-apartment applications.

Using customer feedback Telstrom have gained market dominance through not only having solutions that look good but are durable and easy to install and configure.

The Analogue Modular Video Door Phone offers many configurations depending on your needs. Durable construction and good looks that will last. Settings can be configured via USB cable or telephone handset.

Customised solutions are quick and easy to specify using our specification tool.

- Control access via phone.
- Italian Modular Design
- Full Duplex Audio
- Echo Cancellation
- IP Camera
- Keypad
- 2 relay/switches

MODULAR ANALOGUE DOOR PHONE


The Telstrom MODULAR DOOR PHONE is a truly unique modular door entry system.

Featuring:

- Vertical or horizontal installation options.
- Back-lit LED name plates
- Anodised aluminium frame

Available modules:



- Keypad for dialing or for coded access
- H.263 IP Video and MJPEG Stream
- Analogue CCD Video
- 1,2 or 4 button with back-lit name plates.
- Expand up to 64 buttons (without keypad)
- Expand up to 18 buttons with Keypad

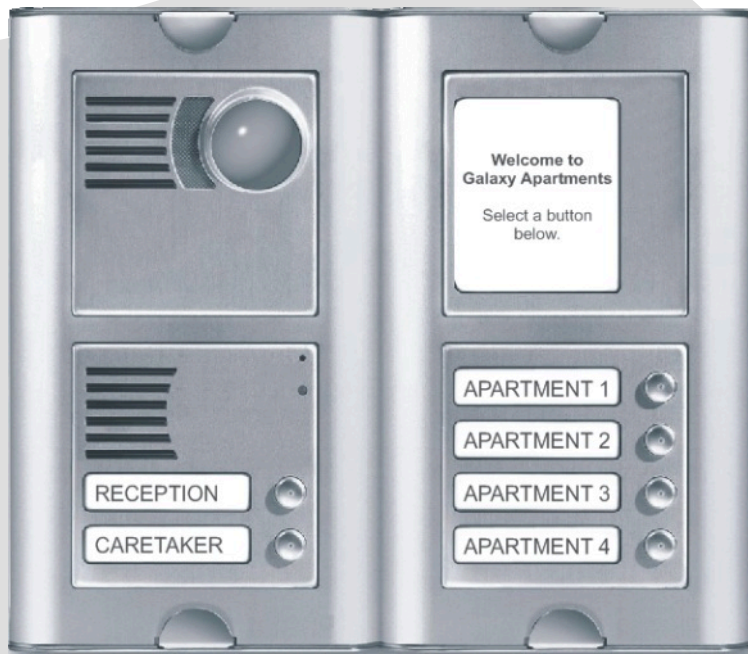

The Analogue Modular door phone range can be powered directly from a PSTN or PBX extension, or run from a 12V source if back lighting is required. Voice is transmitted via two wire analogue and optional video is transmitted via either Ethernet or Coax depending on requirements.

Two separate outputs allow release of door and switch doorway light on or perimeter gate / vehicle gate followed by building entrance release depending on your requirements. Access to your guest is given by selecting keys on your telephone handset (via DTMF) any time during the call.

Telstrom also have button only analogue and IP (with video) door phones in their Slender door phone range. Visit www.telstrom.net for more information.

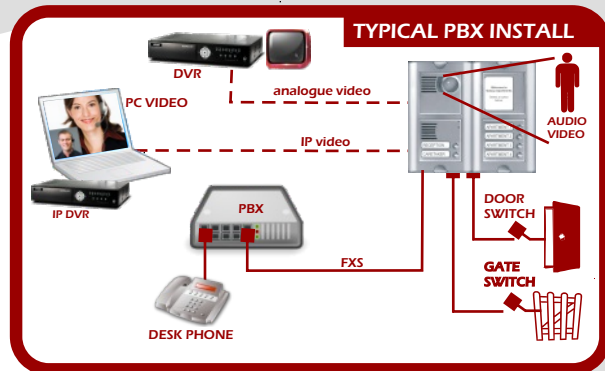

Flush Mount



Surface Mount



Day/Night Mode



2 Switches



VIDEO

Technical Specifications

| | | | |
|------------------|--------------------------------------|--------------------------|---------------------|
| Product name: | MODULAR DOOR PHONE | Consumption: | 300mA - 12VDC |
| Interface: | FXS | Max. switch voltage: | 48V at < 1A |
| Video Interface: | Ethernet (IP option) OR CCD (option) | Max. current of switch: | 2A at < 30 V |
| Bandwidth: | 300 Hz to 3400 Hz | Operational temperature: | -20 to +50°C |
| Power Supply: | 12VDC ± 2V , 10-12VAC ± 2V | Dimensions in mm: | H:185 x W:99 x D:40 |