



IP DOOR ENTRY SOLUTIONS



IP MODULAR DOOR PHONE

Telstrom provide a range of cost effective Door Phone systems, incorporating Italian styling, video and secure access for single entranceways, businesses and multi-apartment applications.

Using customer feedback Telstrom have gained market dominance through not only having solutions that look good but are durable and easy to install and configure.

The IP Modular Video Door Phone offers many configurations depending on your needs. Durable construction and good looks that will last. Settings can be configured via an intuitive web based configurator or optional USB cable.

Customised solutions are quick and easy to specify using our specification tool.

- Control access via phone.
- Italian Modular Design
- Remote Web access
- SIP v2
- Full Duplex Audio
- Echo Cancellation
- IP Camera
- Keypad
- 2 relay/switches

IP MODULAR DOOR PHONE

The Telstrom IP MODULAR DOOR PHONE is a truly unique modular door entry system.

Featuring:

- Vertical or horizontal installation options.
- Back-lit LED name plates
- H.263 IP Video and MJPEG Stream
- Anodised aluminium frame

Available modules:


- Keypad for dialing or for coded access
- IP H.263 camera
- 1,2 or 4 button with back-lit name plates.
- Expand up to 64 buttons (without keypad)
- Expand up to 24 buttons with Keypad

Ask for our Modular Door Phone configurator.

The IP Modular door phone range can be connected directly to a network via a single Ethernet connection with or without PoE (power over Ethernet) to run the unit (separate 12V source can be used if desired). Both Video and Voice transmitted via Internet Protocol (IP) allowing remote access from anywhere you have internet access or connecting the door phone wirelessly if difficult to run cables to door phone.

Two separate outputs allow release of door and switch doorway light on or perimeter gate / vehicle gate followed by building entrance release depending on your requirements. Access to your guest is given by selecting keys on your telephone handset (via DTMF) any time during the call.

Telstrom also have button only analogue and IP (with video) door phones in their Slender door phone range. Visit www.telstrom.net for more information.

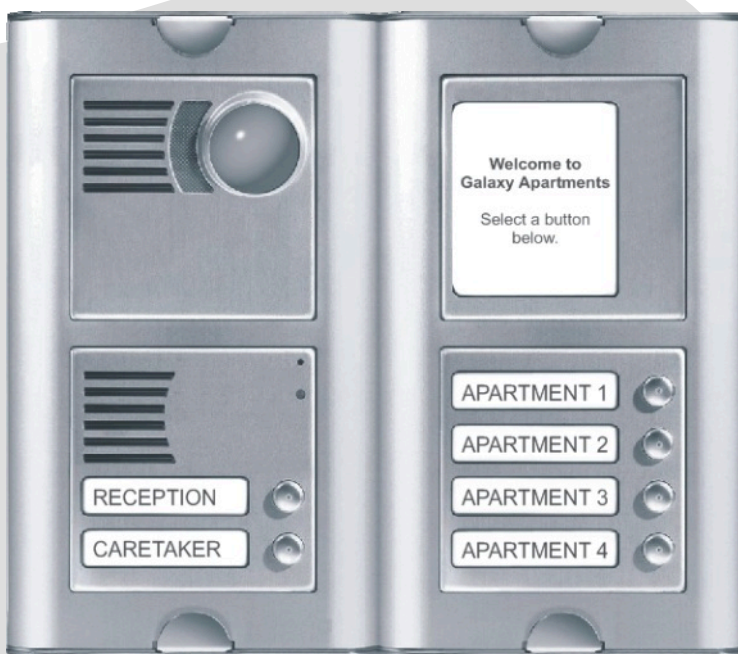

Flush Mount



Surface Mount



Day/Night Mode



2 Switches



IP VIDEO

Technical Specifications

Product name:	IP MODULAR DOOR PHONE	Power:	PoE (IEEE 802.3 af) or external
Interface:	Ethernet 10BaseT, 100BaseTx	Consumption:	300mA - 12VDC
VOIP Protocol:	SIPv2	Max. switch voltage:	48V at < 1A
Video codecs:	H.263 video codec	Max. current of switch:	2A at < 30 V
Bandwidth:	300 Hz - 3400 Hz	Operational temperature:	-20 to +50 °C
Power Supply:	12VDC ± 2V , 10-12VAC ± 2V	Dimensions in mm:	H:185 x W:99 x D:40